




ESD Solutions for I²C Bus Protection

RClamp®0582BQ

KEY FEATURES

- 5V working voltage
- Protects two high-speed data lines
- $\pm 25\text{kV}$ contact/ $\pm 30\text{kV}$ air
- Dynamic resistance: 0.52Ω
- Low capacitance: 1.2pF (typ)
- Industry standard SC-75 package

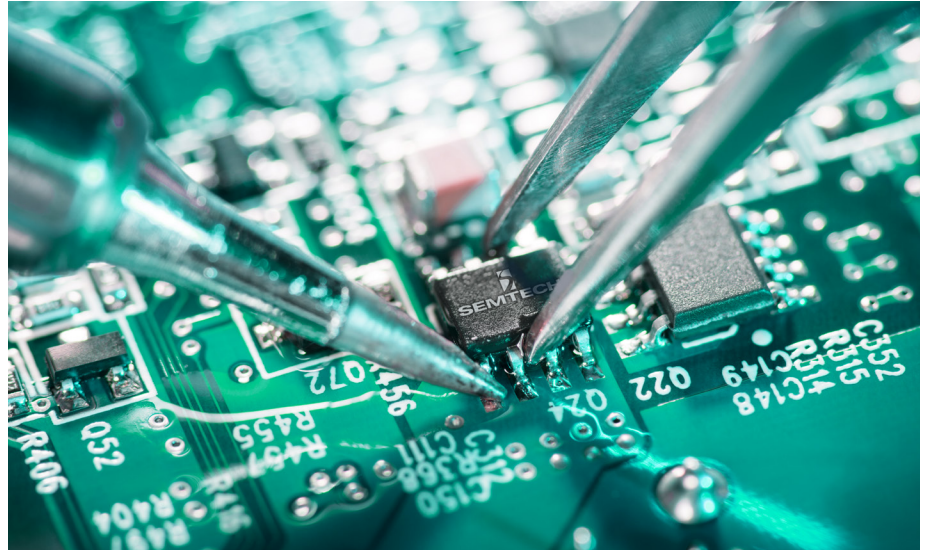

Alternative Solutions

RClamp®0502A

KEY FEATURES

- 5V working voltage
- Protects two high-speed data lines
- $\pm 15\text{kV}$ contact/ $\pm 20\text{kV}$ air
- Low capacitance: 0.7pF I/O to I/O
- Flow-through package ($1.6 \times 1.6 \times 0.6\text{mm}$)

RClamp®0531TQ


KEY FEATURES

- 5V working voltage
- Protects one high-speed data line
- $\pm 12\text{kV}$ contact/ $\pm 20\text{kV}$ air
- Low capacitance: 0.8pF I/O to GND
- Flow-through package ($1.0 \times 0.6 \times 0.4\text{mm}$)

ESD Protection to Safeguard I²C Bus

The I²C bus was developed to enable intermodule communication between circuit boards within a system. Today, the bus is mainly used to connect peripherals to microcontroller on a PCB system. The I²C bus, primarily employed for short distance communication, ranges from 100kbps to 5Mbps.

The I²C bus is often vulnerable to ESD transient voltage spikes and it is important to safeguard I²C bus interfaces from these dangerous overvoltage events. The circuit below shows an example of using a low-clamping voltage TVS array for protecting the two line I²C bus (SDA and SCL lines) from transient voltage threats.

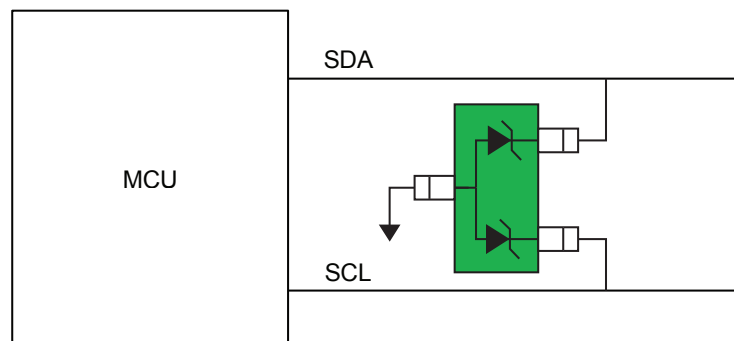

I²C Bus Protection with Semtech's RClamp0582BQ TVS Array

RClamp®0582BQ - Absolute Maximum Rating

Maximum Rating	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{pk}	300	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{pp}	15	A
ESD per IEC 61000-4-2 (Air) ⁽¹⁾ ESD per IEC 61000-4-2 (Contact) ⁽¹⁾	V_{ESD}	± 30 ± 25	kV
Operating Temperature	T_j	-40 to +105	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics (T = 25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-Off Voltage	V_{RWM}	Pin 1 or Pin 2 to Pin 3			5	V
Reverse Breakdown Voltage	V_{BR}	$I_{BR} = 1mA$, Pin 1 to Pin 2 to Pin 3	6		11	V
Reverse Leakage Current	I_R	$V_{RWM} = 5V$ T = 25°C, Pin 1 or Pin 2 to Pin 3 and between Pin 1 and 2			0.1	μA
					0.23	μA
Clamping Voltage	V_C	$t_p = 8/20\mu s$ Pin 1 or Pin 2 to Pin 3			15	V
					20	
ESD Clamping Voltage ⁽²⁾	V_C	$t_p = 0.2/100ns$ Pin 1 or Pin 2 to Pin 3		13.8		
				20.1		
Dynamic Resistance ^{(2) (3)}	R_{DYN}	$t_p = 0.2/100ns$, Pin 1 or Pin 2 to Pin 3		0.52		ohm
Junction Capacitance	C_j	Any I/O to Gnd $V_R = 0$, $f = 1MHz$, Pin 1 to pin 2		0.5	0.8	pF
		I/O to I/O $V_R = 0$, $f = 1MHz$, Pin 1 or Pin 2 to Pin 3			1.2	pF

Notes

1) Measured with a 40dB attenuator, 50Ohm scope input impedance, 2GHz bandwidth. ESD gun return path connected to ESD ground plane.

2) Transmission Line Pulse Test (TLP) Settings: $t_p = 100ns$, $t_r = 0.2ns$, I_{TLP} and V_{TLP} averaging window: $t_1 = 70ns$ to $t_2 = 90ns$.

3) Dynamic resistance calculated from $I_{TLP} = 4A$ to $I_{TLP} = 16A$.

ORDERING INFORMATION

Part Number	Qty Per Reel	Reel Size
RClamp0582BQTCT	3,000	7 inches

RClamp®0502A - Absolute Maximum Rating

Maximum Rating	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{pk}	50	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{pp}	3	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 20 ± 15	kV
Operating Temperature	T_j	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics (T = 25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-Off Voltage	V_{RWM}	Between I/O lines to Gnd or I/O to I/O			5	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1mA$, Between I/O lines to Gnd	6			V
Reverse Leakage Current	I_R	$V_{RWM} = 5V$, $T = 25^\circ C$ Between I/O lines to Gnd or I/O to I/O			1	μA
Clamping Voltage	V_C	$I_{pp} = 1A$, $t_p = 8/20\mu s$ Between I/O lines to Gnd			14	V
		$I_{pp} = 3A$, $t_p = 8/20\mu s$ Between I/O to Gnd			16	V
		$I_{pp} = 3A$, $t_p = 8/20\mu s$ Between I/O to I/O			16	V
Junction Capacitance	C_j	$V_R = 0V$, $f = 1MHz$ Between I/O to Gnd			0.9	pF
		$V_R = 0V$, $f = 1MHz$ Between I/O to I/O		0.3	0.7	pF

ORDERING INFORMATION

Part Number	Qty Per Reel	Reel Size	Lead Finish
RClamp0502A.TCT	3,000	7 inches	Pb Free

RClamp®0531TQ - Absolute Maximum Rating

Maximum Rating	Symbol	Value	Unit
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{pk}	80	W
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{pp}	4	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	± 20 ± 12	kV
Operating Temperature	T_j	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Characteristics (T = 25°C)

Parameter	Symbol	Condition	Min	Typ	Max	Units
Reverse Stand-Off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_t = 1mA$	6	9.3	11	V
Reverse Leakage Current	I_R	$V_{RWM} = 5V, T = 25^\circ C$		0.010	0.100	μA
		$V_{RWM} = 5V, T = 125^\circ C$		0.020	0.200	μA
Clamping Voltage	V_C	$I_{pp} = 1A, t_p = 8/20\mu s$			12	V
		$I_{pp} = 4A, t_p = 8/20\mu s$			20	V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz, T = 25^\circ C$		0.5	0.8	pF
		$V_R = 0V, f = 1MHz, T = 125^\circ C$		0.85	1.5	pF

ORDERING INFORMATION

Part Number	Qty Per Reel	Reel Size	Lead Finish
RClamp0531TQTCT	3,000	7 inches	Lead-free NiPdAu



200 Flynn Road, Camarillo, California 93012 • phone: (805) 498-2111 • fax: (805) 498-3804

Semtech, the Semtech logo and RClamp are registered marks of Semtech Corporation. All other trademarks and trade names mentioned may be marks and names of their respective companies. Semtech reserves the right to make changes to, or discontinue any products described in this document without further notice. Semtech makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. ©2017 Semtech Corporation. All rights reserved. I2C-Bus-PB